


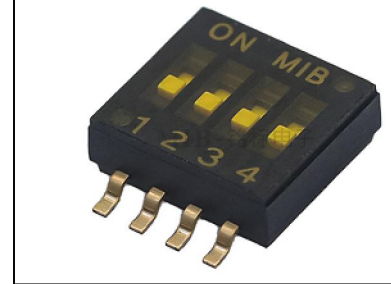



推柄在
off状态

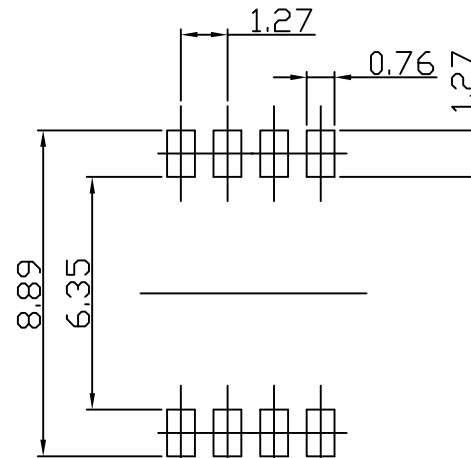

CIRCUIT

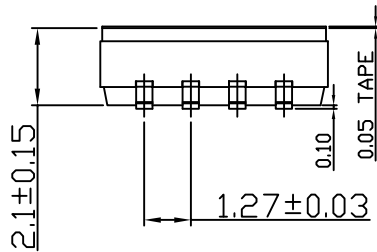

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -40°C to +85°C
 Rating: 25mA, 24V DC Max
 Insulation resistance: 100MΩ min. 100V DC
 Dielectric strength: 100V AC for 1min
 Contact resistance: 100mΩ Max
 Life: 1,000 Cycles
 Operating force: 500gf Max

PART NO.	NO. OF POS	DIM A
DHMF01-02	02	3.67
DHMF01-04	04	6.21
DHMF01-06	06	8.75
DHMF01-08	08	11.29
DHMF01-10	10	13.83
DHMF01-12	12	16.37



		东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.						
TOLERANCE				DESIGN	DATE	TITLE	DIP Switch	
UNLESS OTHERWISE STATED				WYJ	2022.03.21			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	DHMF01-0423L-FT-R	
X.XX	±0.15	REV	A	APPD	DATE	SHEET	1/3	
X.XXX	±0.10	UNIT	mm	PRINT DATE	2023.12.19			
<	±2°	SCALE	5:1					