

1 2 3 4 5 6 7 8 9 10

A

B

C

D



E

F


G

H


本公司智慧财产未经许可不得复制
ning biao copyright, may not be used without permission from ning biao.

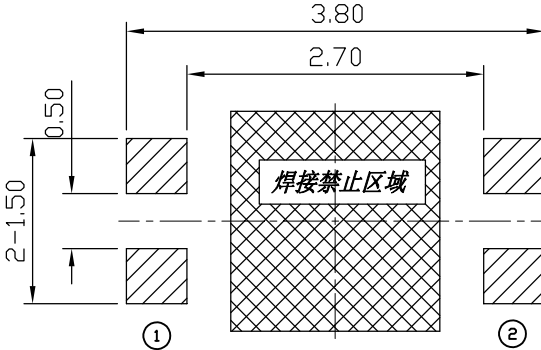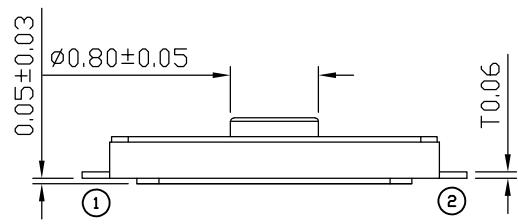



P.C.B LAYOUT



CIRCUIT

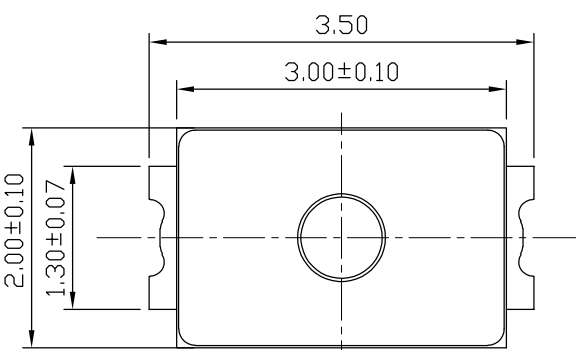

0.43±0.05

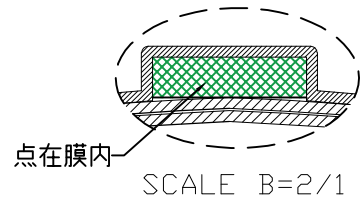

0.6±0.10

SPECIFICATIONS:

- Operating temperature range: -30°C to +85°C
- Rating: 50mA, 12V DC Max
- Insulation resistance: 100MΩ min, 100V DC
- Dielectric strength: 100V AC for 1min
- Contact resistance: 100mΩ Max
- Life: 100,000 Cycles
- Travel: 0.18±0.05mm
- Operating force: 250±50gf



		东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.					
TOLERANCE UNLESS OTHERWISE STATED				DESIGN WYJ	DATE 2017. 10. 19	TITLE Tact Switch	
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TAF03-BWC-VR
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
∠	±2°	SCALE	15:1			PRINT DATE	2023.12.29

A

B

C

D

E

F

G

H